


Auto MiniMill



Auto MiniMill is fully automatic machine with adjustable feed rate, actuated by foot switch, ideal for repetitive cycle works on condensers and heat exchangers. AutoMiniMill is specially designed for trimming and weld removal. This tool is based on the MiniMill-300 – fast facing and end preparation lathe is designed for tubes including stainless and other high chromium alloys. It works with all MiniMill300 compatible cutter heads, see page 12 and charts on page 42.

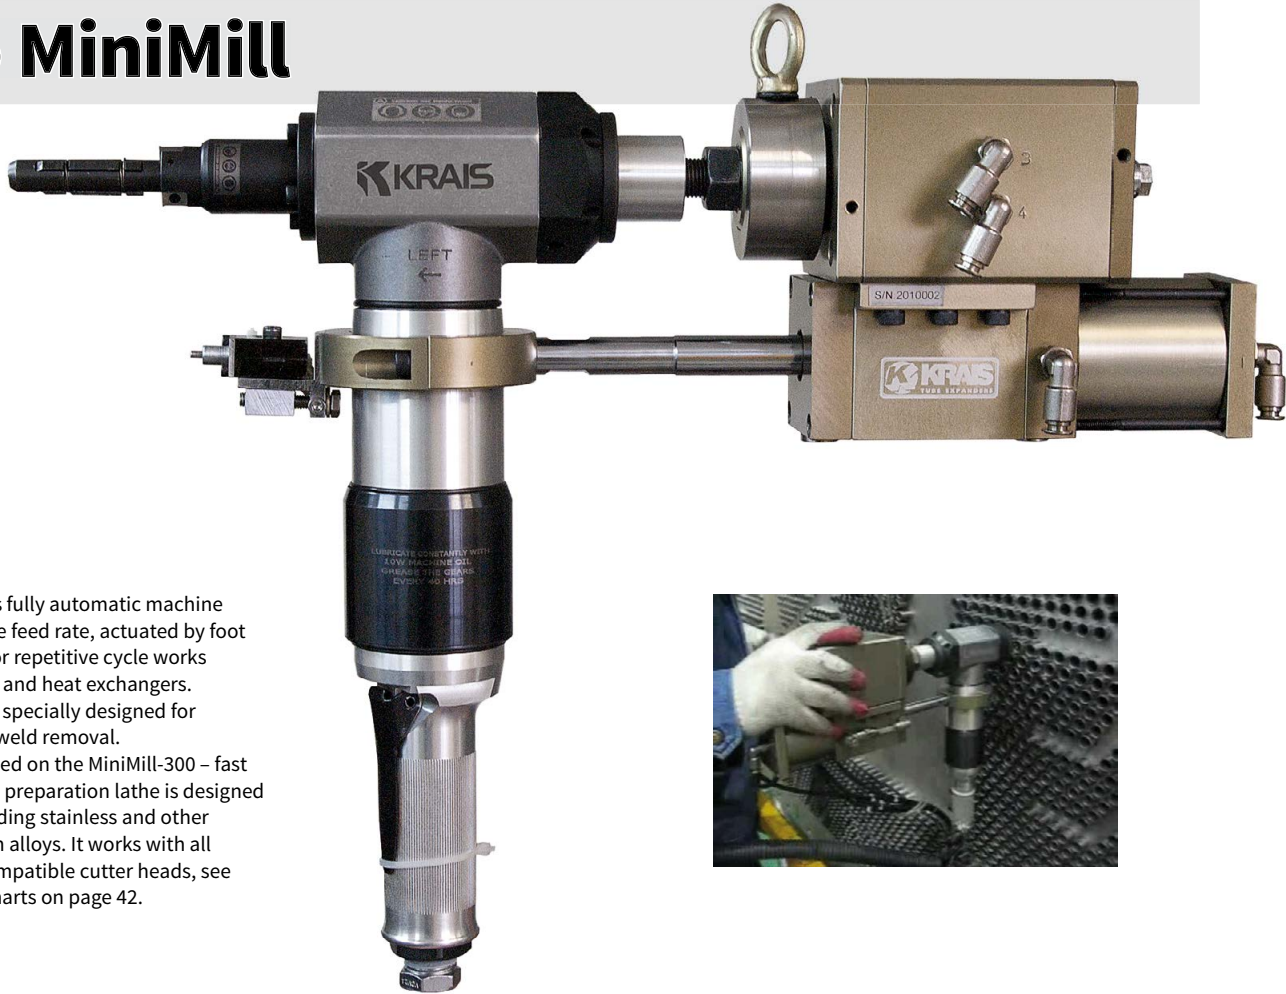

	APPLICATION RANGE	STD. LOCKING RANGE	FREE SPEED	POWER	TORQUE
MiniMill Auto	12,5 – 38 mm	12,5 – 23 mm	300 Rpm	1,3 Hp	43 Nm
	0,492 – 1,496 "	0,492 – 0,906 "			31,71 Ft.Lbs
Recommended to	Tube facing ■ Tube bevelling				

Air consumption:	55 cfm	1,3 m³/min	Body width:	2,32"	59 mm	Body height:	13,1"	335 mm	Body weight:	11,4 Lbs	5,2 kg
-------------------------	--------	------------	--------------------	-------	-------	---------------------	-------	--------	---------------------	----------	--------

